


R5000

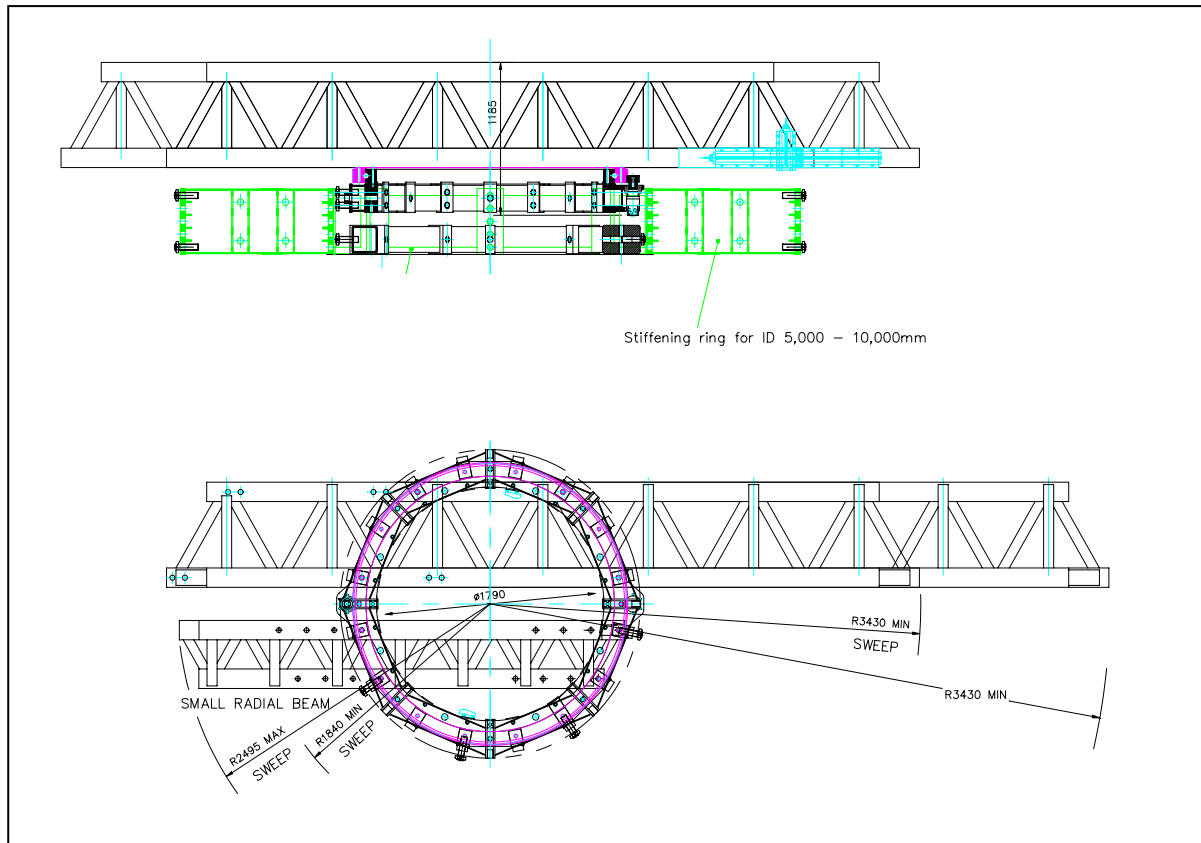

Stiffening ring for ID 5,000 - 10,000mm

Machine Data

Internal Location

Machining Capacity Ø2400 - Ø10000 mm

Location diameters Ø2400- Ø10000 mm

External Location

Machining Capacity Ø0 - Ø1790mm

Location diameters Ø100 - Ø1790mm

Drive Information

Cutting speed 20 m / min.

OMS 315 30 l/min. 3rpm (m/c speed)

Gear Ratio 1 : 24

Other Information

Radial and axial feed can be automatic giving a feed range between 0 and 1mm per rev.

Machine can be hydraulic driven producing 5kW of machining power, or Air driven giving 2.5 kw of machining power.

Radial Arm beams can be positioned in 4 places to give maximum travel or minimum sweep radius.

Non standard beams can be manufactured for special applications.

Beams for turning operations can be added with either a cutting tool or linisher for machining of diameters.

Weight of m/c and large radial beams with support platform = 4550 kg

This machine is designed to operate in the horizontal, vertical, inverted and inclined positions

The range of Reekie Machine Tools cover machining capacities from zero to 10 metres diameter, and operate successfully on all ferrous and non-ferrous material capable of normal machining